



I. Create Scene Mode


Login in APP, Click **【Scene】** — **【+】** or **【Add】** --Input Mode name, choose Mode icon, Time setting Optional(Function of timing), at **【Mode setting】**, input the actions you want to control, click**【Save】**; see below pic4-2, pic4-3, pic4-4, pic4-5.

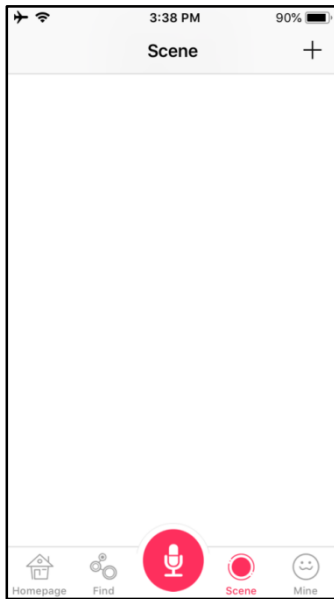


Pic4-2 Add Scene

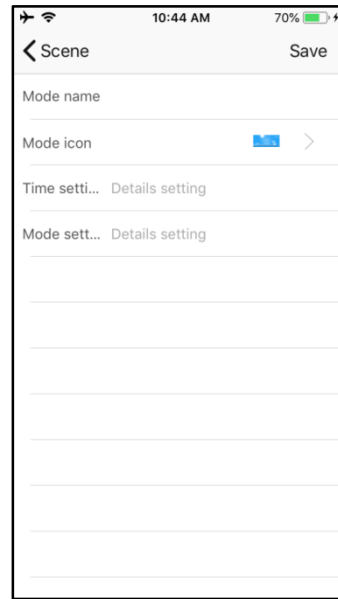

Pic4-3 Add Scene 2

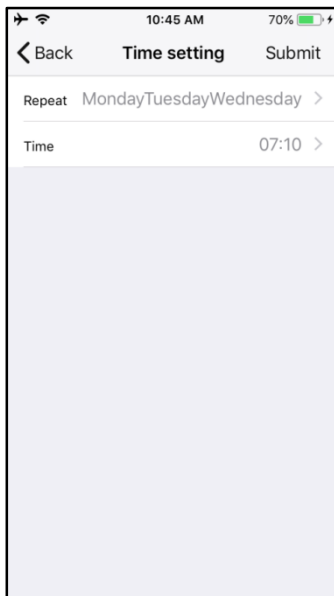

Pic4-4 Time setting (Optional)

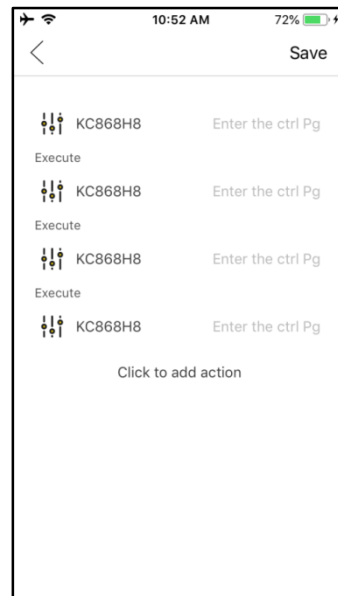

Pic4-5 Mode setting (Actions controlled)

“Mode name” can be named; e.g.: Back Home, Leaving Home, Meeting;

“Mode icon” can be changed;

“Time setting” is for timing (optional), Pic4-4, Repeated time: Monday, Tuesday, Wednesday and 7:10 am.


Meaning the scene mode is opened at 7:10 am each Monday, Tuesday and Wednesday.

“Mode setting” is for adding the actions required to control


1. Press ‘Click to add action’, choose KC868H8
2. Press [Enter the ctrl pg], you can set the actions, see Pic4-7

- a. Open light1
- b. Press the name, it will save the action
3. Press Execute ,you can set Delay time
4. Press 'Save'


See Pic4-6, Pic4-7, Pic4-8。

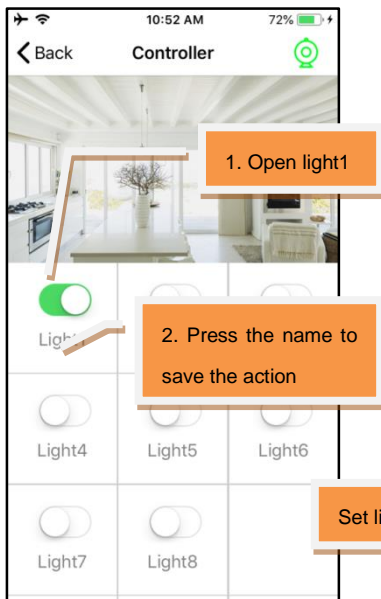

Pic4-6

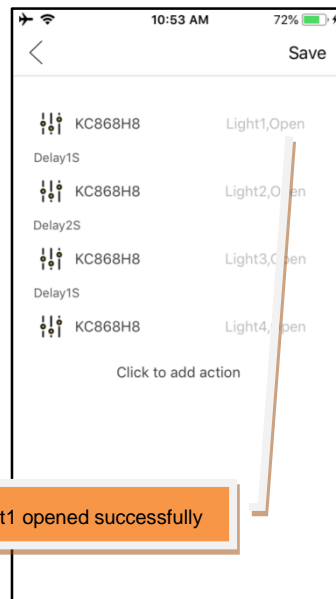

Pic4-7




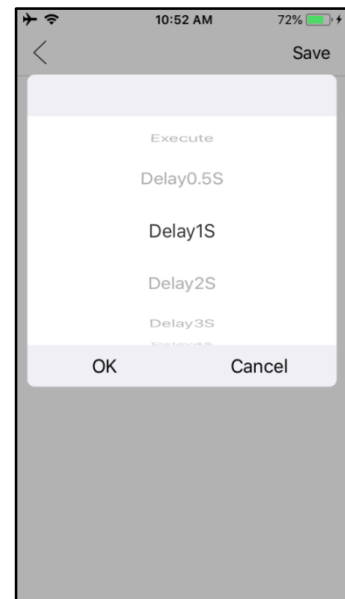


Pic4-8

II. Inputting terminals trigger linkage of the scene mode

Click **【Mine】** ---- **【Setting】** -- **【Safe set】** ,Hold pressing **【input1】** to left,

The parameters can be modified.

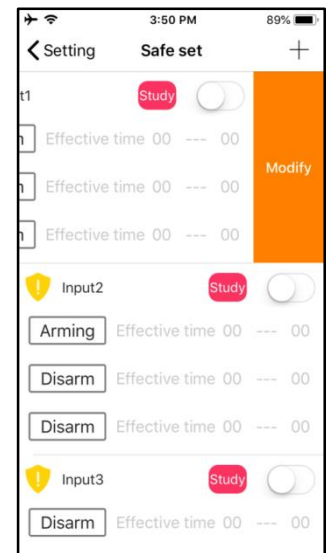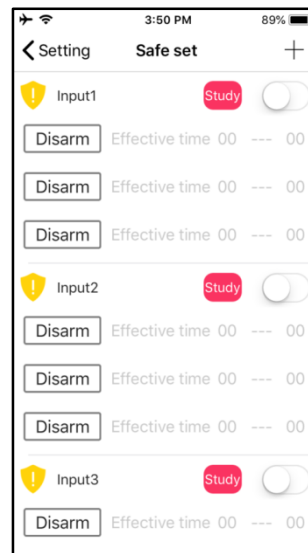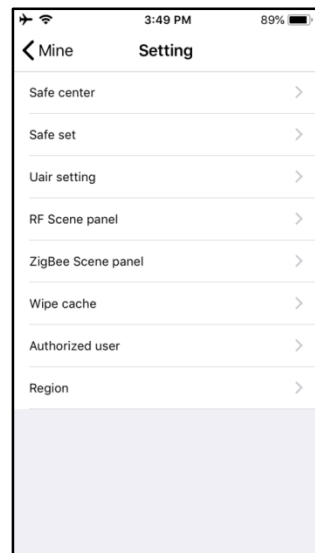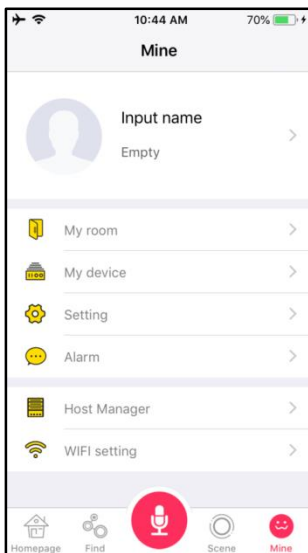

【Device name】 : input one name

【Related scene】 click to choose one scene mode to linkage

【Alarm message】 Input message text sent to mobile(setting message allowed);

3:50 PM 89%

< Save

Device name Input1

Related scene: Select a trigger scene mode

Alarm message

When inputting terminals are triggered, the phone will receive **【Alarm message】** ;
And the actions of the scene mode will be opened.

